

SPECIFICATION SHEET



CurrentLeak™: Model MV1-CTV1
Whole Home Ground Fault Monitor



Monitoring your entire electrical system for ground faults has never been easier, thanks to CurrentLeak™.

Easily installed in any electrical service entrance panel, CurrentLeak™ is your #1 defense against ground faults.

FEATURES & BENEFITS


- ✓ Whole house ground fault monitoring
- ✓ Comes complete with all hardware
- ✓ Visual and audible notifications
- ✓ Intermittent fault time delay
- ✓ Quick installation

TECHNICAL DETAILS

Intended use: Indoor use, Max 400A service entrance panel
 Altitude: Max 2,000m
 Input supply voltage: 120v, 60Hz
 Output voltage: 9VDC
 Input current: 0.132A (Monitor) 0-99mA (CT)
 Max rated current: 0.67A (Monitor) 0-99mA (CT)
 Operating conditions: 5-40°C, 80% max RH at 5-31°C, decreasing linearly to 50% max RH at 40°C
 Certifications: Conf to UL STD 61010-1 & 61010-2-030
 Cert to CSA C22.2 No.61010-1 & 61010-2-030
 Warranty: One year. For complete warranty details, refer to your installation manual



Monitor dimensions

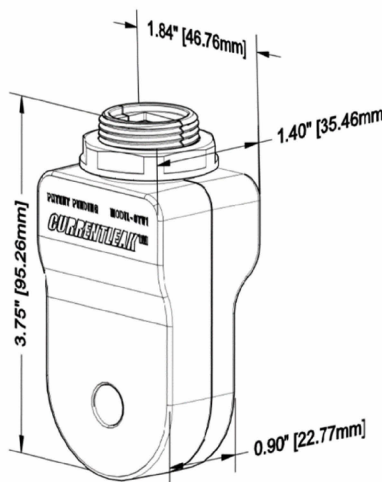

CT dimensions



Pivotal Product Developments Ltd.
 244 Brockport Drive, Unit 12
 Toronto, ON M9W 6X9

PATENT NO.: US 10,855,068 B2
 PATENT NO.: CA 3,007,230 C

PIVOTAL PRODUCT DEVELOPMENTS LTD. ©ALL RIGHTS RESERVED